

CleanStar Direct Pump Systems



Model 1500-C

Grease Storage Tank Features

Stainless steel outer shell • Increased capacity of 1500 lbs. • 30" diameter • Overall height 89"
Energy saving immersion heater • 2 Level Probe and Control Panel • Power Failure Alarm
Dish Bottom tank prevents "fine" buildup

Grease Caddy Features

Capacity approx. 75 lbs. of used shortening • 12" width, 29" length, 10.5" height • Dry weight approx. 115 lbs.
Stainless steel structure • 1/3 HP transfer pump w/special power connector that obtains power from storage tank for evacuation • Special quick-connectors provide for safe and easy transfer of used shortening into storage tank



Model 1500-D

Vacuum pump transfers used cooking oil directly from your fryer to your CleanStar Tank • Stainless steel outer shell
Increased Capacity of 1500 lbs. • 30" diameter, height 92" overall • Energy saving Immersion heater
2 Level Probe & Timer Control Panel • Power Failure Alarm • Dish Bottom tank to prevent "fine" buildup



Model 1500-H

Uses your fryer pump and filter to transfer oil to your CleanStar Tank

Includes: Wall Mounted Manifold Kit • Galvanized Piping on Walls
High temperature 3/4" steel braided edible oil hose or galvanized piping for ceiling

Tank Features include: Stainless steel outer shell • New increased capacity of 1500 lbs.

New Tank Size is 30" diameter, 82" height • 2 Level Probe and Control Panel • The Immersion Heater
New Power Failure Alarm • Dish Bottom Tank to prevent "fine" buildup.



Model 2500-C

Grease Storage Tank Features

Pump Station located inside store • Increased Capacity of 2500 lbs. • 42" diameter • Overall height 91"
Two energy saving Immersion heaters • 2 Level Probe and Control Panel • New Power Failure Alarm
Dish Bottom tank prevents "fine" buildup

Grease Caddy Features

Capacity approx. 75 lbs. of used shortening • 12" width, 29" length, 10.5" height • Dry weight approx. 115 lbs.
1/3 HP transfer pump w/special power connector that obtains power from storage tank for evacuation
Special quick-connectors provide for safe and easy transfer of used shortening into storage tank




Model 2500-D

Direct Pump Features Outside Storage

Vacuum Pump will transfer used cooking oil directly from your fryer to your CleanStar tank. Features include: Pump station located inside store • transfer hose and filter wand.

Tank Features:

Increased Capacity of 2500 lbs. • 42" diameter • Overall height 91" • Two Immersion heaters
2 Level Probe & timer Control Panel • Power Failure Alarm • Dish Bottom tank to prevent "fine" buildup

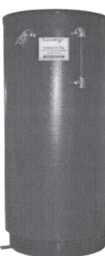

Model 2500-H


Direct Pump Features

Uses your fryer pump and filter to transfer oil to your CleanStar Tank

Includes: Wall Mounted Manifold Kit • Galvanized Piping on Walls

Tank Features include: Stainless steel outer shell • New increased capacity of 2500 lbs.

New Tank Size is 42" diameter, 91" height • 2 Level Probe and Control Panel • The Immersion Heater
New Power Failure Alarm • Dish Bottom Tank to prevent "fine" buildup.

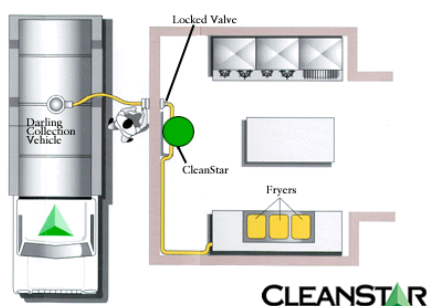

All Systems Include:

- 1 year parts warranty
- Operation & installation manual
- Training DVDs or Videos
- CleanStar is backed by a team of technical professionals